

FORD F-150 RAPTOR (GEN 2/3)

SKU: BBFTA004



Thank you for purchasing the Blackboost Ford F-150 Raptor Gen2/3 FTA Adapter.

This guide will provide you the instructions on how to install the BlackBoost FTA Adapter.

Content of the Box

- | | | |
|----------------|---|---|
| 1. FTA Adapter | - | 1 |
| 2. Screws | - | 2 |



Compatibility

- F-150 Raptor (P552) - 3.5L EcoBoost V6 TT - (2017 - 2020)
- F-150 Raptor (P702) - 3.5L EcoBoost V6 TT - (2021+)
- F-150 (P552) - 3.5L EcoBoost V6 TT - (2017 - 2020)
- F-150 (P702) - 3.5L EcoBoost V6 TT - (2021+)

Step 1

Unscrew all 4 bolts to remove the Skid plate.



Step 2

Unclip the metal snap ring using a flat head screw driver.

Disconnect the plastic elbow and push it back or turn it to access the Diverter valve.



Step 3

Use a hex nut driver and unscrew both the nuts from the diverter valve.



Step 4

Disconnect the wire from the diverter valve. Remove diverter valve completely.



Step 5

Connect the BlackBoost FTA adapter as show below and tighten the screw. Then reconnect the wire back to the diverter valve.




Step 6

Connect the plastic elbow back and clip the metal snap ring.



Step 7

Place the Skid plate and tighten the bolts.

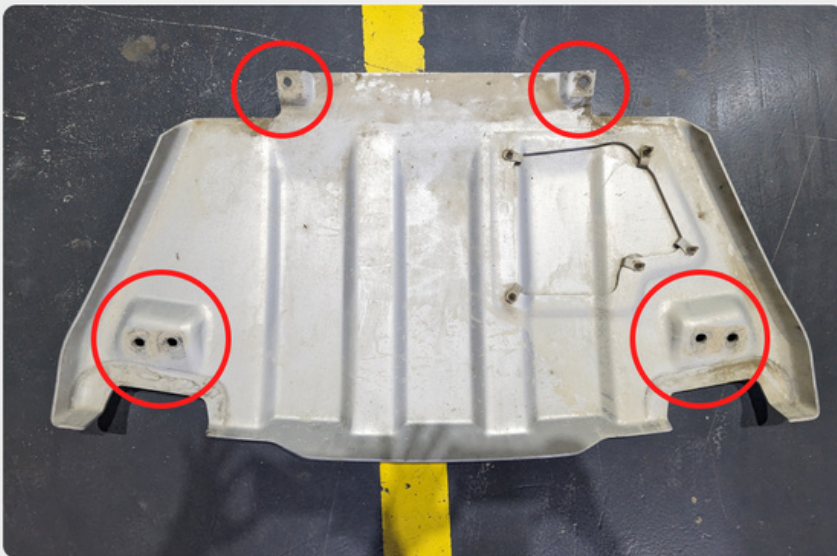



Thank you again for your purchase.

Hope you enjoy, drive safe & responsibly.

Disclaimer: *In no event will BlackBoost, or its affiliates be liable for any damage to your car, its components or yourself. Please be aware of local laws and regulations prior to installation.*